



POLYESTER WEBBING SLING

FLAT WEBBING SLING
ROUND SOFT SLING
ENDLESS WEBBING SLING
ONE WAY SLING
WEBBING BELT/TAPE
TOW STRAP



FLAT WEBBING SLING

FLAT WEBBING SLING (EN1492-1)

Polyester Flat Webbing Sling

Type

—Double ply polyester webbing sling with reinforced lifting eyes

Technical specifications

Wide & flat load bearing surface

Sling has reinforced eyes at both ends

Capacity from 1t to 48t

Color coded according to EN 1492-1.

Characteristics

Low elongation

Norms

According to Machine Directive 2006/42/EC & EN 1492-1

Safety Factor: 7:1 to EN 1492-1

Safety Factor of 6:1 or 5:1 is available upon request



Color coded according to EN1492-1	Working Load Limit with 1 webbing sling					Working Load Limit with 2 webbing slings			
	Straight lift	Choked lift	β			Straight lift up to 45	Choked lift up to 45	Straight lift 45-60	Choked lift 45-60
			0-7	7-45	45-60				
	1.0	0.8	2.0	1.4	1.0	1.4	1.12	1.0	0.8
WLL1T	1,000	800	2,000	1,400	1,000	1,400	1,120	1,000	800
WLL2T	2,000	1,600	4,000	2,800	2,000	2,800	2,240	2,000	1,600
WLL3T	3,000	2,400	6,000	4,200	3,000	4,200	3,360	3,000	2,400
WLL4T	4,000	3,200	8,000	5,600	4,000	5,600	4,480	4,000	3,200
WLL5T	5,000	4,000	10,000	7,000	5,000	7,000	5,600	5,000	4,000
WLL6T	6,000	4,800	12,000	8,400	6,000	8,400	6,720	6,000	4,800
WLL8T	8,000	6,400	16,000	11,200	8,000	12,000	8,960	8,000	6,400
WLL10T	10,000	8,000	20,000	14,000	10,000	14,000	11,200	10,000	8,000
WLL12T	12,000	9,600	24,000	16,800	12,000	16,800	13,440	12,000	9,600






Webbing sling is produced from top quality synthetic fiber by advanced international level of weaving technology and equipment in various sewing methods. According to customer's requirement, the safety factor of sling has 4:1, 5:1, 6:1, 7:1, 8:1, its load range is from 0.2t to 50t which is produced according to international standard, for color and load capacity.

S.F	6:1		7:1		8:1	
	Width	M.B.S	Width	M.B.S	Width	M.B.S
1000	25/38mm	6t	30/50mm	7t	50mm	8t
2000	50mm	12t	60mm	14t	65mm	16t
3000	75mm	18t	90mm	21t	95mm	24t
4000	100mm	24t	120mm	28t	120mm	32t
5000	125mm	30t	150mm	35t	150mm	40t
6000	150mm	36t	180mm	42t	180mm	48t
8000	200mm	48t	240mm	56t	240mm	64t
10000	250mm	60t	300mm	70t	300mm	80t
12000	300mm	72t	300mm	84t	/	/
MEMO	JB/T8521.1		EN1492.1		AS1353	



SAFETY FACTOR 5:1 & 6:1 FLAT POLYESTER SLING TYPE (SINGLE PLY)

WLL(KG)	WIDTH(MM)	COLOR	WLL in kg at different modes				
			Straight lift 	Basket lift 	7°-45° 	Choker hitch 	45°-60° 
500	25	Violet	500	1000	700	400	500
1000	50	Green	1000	2000	1400	800	1000
1500	75	Yellow	1500	3000	2100	1200	1500
2000	100	Grey	2000	4000	2800	1600	2000
2500	125	Red	2500	5000	3500	2000	2500
3000	150	Brown	3000	6000	4200	2400	3000
4000	200	Blue	4000	8000	5600	3200	4000
5000	250	Orange	5000	10000	7000	4000	5000
6000	300	Orange	6000	12000	8400	4800	6000

SAFETY FACTOR 5:1 & 6:1 FLAT POLYESTER SLING TYPE (DOUBLE PLY)

WLL(KG)	WIDTH(MM)	COLOR	WLL in kg at different modes				
			Straight lift 	Basket lift 	7°-45° 	Choker hitch 	45°-60° 
1000	25	Violet	1000	2000	1400	800	1000
2000	50	Green	2000	4000	2800	1600	2000
3000	75	Yellow	3000	6000	4200	2400	3000
4000	100	Grey	4000	8000	5600	3200	4000
5000	125	Red	5000	10000	7000	4000	5000
6000	150	Brown	6000	12000	8400	4800	6000
8000	200	Blue	8000	16000	11200	6400	8000
10000	250	Orange	10000	20000	14000	8000	10000
12000	300	Orange	12000	24000	16800	9600	12000

SAFETY FACTOR 7:1 FLAT POLYESTER SLING TYPE (DOUBLE PLY)

WLL(KG)	WIDTH(MM)	COLOR	WLL in kg at different modes				
			Straight lift 	Basket lift 	7°-45° 	Choker hitch 	45°-60° 
1000	30	Violet	1000	2000	1400	800	1000
2000	60	Green	2000	4000	2800	1600	2000
3000	90	Yellow	3000	6000	4200	2400	3000
4000	120	Grey	4000	8000	5600	3200	4000
5000	150	Red	5000	10000	7000	4000	5000
6000	180	Brown	6000	12000	8400	4800	6000
8000	240	Blue	8000	16000	11200	6400	8000
10000	300	Orange	10000	20000	14000	8000	10000
12000	300	Orange	12000	24000	16800	9600	12000

SAFETY FACTOR 5:1 & 6:1 & 7:1 FLAT POLYESTER SLING TYPE (FOUR PLY)








WLL(KG)	SF 5:1 SF 6:1 WIDTH (MM)	SF 7:1 WIDTH (MM)	COLOR	WLL in kg at different modes				
				Straight lift 	Basket lift 	7°-45° 	Choker hitch 	45°-60° 
2000	25	30	Violet	2000	4000	2800	1600	2000
4000	50	60	Green	4000	8000	5600	3200	4000
6000	75	90	Yellow	6000	12000	8400	4800	6000
8000	100	120	Grey	8000	16000	11200	6400	8000
10000	125	150	Red	10000	20000	14000	8000	10000
12000	150	180	Brown	12000	24000	16800	9600	12000
16000	200	240	Blue	16000	32000	22400	12800	16000
20000	250	300	Orange	20000	40000	28000	16000	20000
24000	300	300	Orange	24000	48000	33600	19200	24000

WEBBING SLING (ASME/ANSI B30.9) EYE-EYE WEBBING SLING

Material: Polyester or nylon
 Minimum Safety Factor: 5:1
 Length: As required
 Working temperature range: -40°C-100°C
 Standard: ASME B30.9 WSTDA-WS-1
 We make these products according to ASME B30.9,
 WSTDA-WS-1, Customers could choose a special length
 based on specific requirements.



RATED LOAD FOR TWO-PLY, SYNTHETIC WEBBING SLINGS (LBS)

Series	Hitch Type Width(in.)	Type I,II,III, and IV Single-leg			Two-leg or Single Basket Horizontal Angle				Type V Endless Vertical
		Vertical	Choke	Vertical basket	Vertical basket	60 deg	45 deg	30 deg	
									
Class 5	1	2200	1760	4400	4400	3800	3100	2200	4400
	1 1/2	3300	2640	6600	6600	5700	4700	3300	6600
	1 3/4	3800	3040	7600	7600	6600	5400	3800	7600
	2	4400	3520	8800	8800	7600	6200	4400	8800
	3	6600	5280	13200	13200	11400	9300	6600	13200
	4	8200	6560	16400	16400	14200	11600	8200	16400
	5	10200	8160	20400	20400	17700	14400	10200	20400
Class 7	6	12300	9840	24600	24600	21300	17400	12300	24600
	1	3100	2480	6200	6200	5400	4400	3100	6200
	1 1/2	4700	3760	9400	9400	8100	6600	4700	9400
	1 3/4	5400	4320	10800	10800	9400	7600	5400	10800
	2	6200	4960	12400	12400	10700	8800	6200	12400
	3	8800	7040	17600	17600	15200	12400	8800	17600
	4	11000	8800	22000	22000	19100	15600	11000	22000
	5	13700	10960	27400	27400	23700	19400	13700	27400
	6	16500	13200	33000	33000	28600	23000	16500	33000
	8	22750	18200	42350	42350	36700	29900	22750	42350
10	28400	22720	52900	52900	45800	37400	28400	52900	
12	34100	27280	63500	63500	55000	44900	34100	63500	

Class 5 means rated loads are based on a stuffer weave construction webbing possessing a minimum certified tensile strength of 6,800 lbs/inch width

Class 7 means rated loads are based on a stuffer weave construction webbing possessing a minimum certified tensile strength of 9,800 lbs/inch width










WEBBING SLING AS 1353


FLAT WEBBING SLING TO AUSTRALIAN STANDARD AS 1353



Webbing slings are manufactured from high quality polyester fibers to comply with the requirements of AS 1353 with the safety factor of 8:1.

Wetop Webbing Slings are color coded as standard and have stripes for easy identification of WLL. Wetop webbing slings also feature reinforced eyes for extended life. Each sling is individually proof tested at manufacture and comes with a Test Certificate. Sizes range from 1 Ton to 8 Tons.

Color coded according to AS1353	Working Load Limit with 1 webbing sling					Working Load Limit with 2 webbing sling			
	Straight lift	Choked lift	β			Straight lift up to 45	Choked lift up to 45	Straight lift 45-60	Choked lift 45-60
			0-7	7-45	45-60				
									
1.0	0.8	2.0	1.4	1.0	1.4	1.12	1.0	0.8	
WLL1T	1,000	800	2,000	1,400	1,000	1,400	1,120	1,000	800
WLL2T	2,000	1,600	4,000	2,800	2,000	2,800	2,240	2,000	1,600
WLL3T	3,000	2,400	6,000	4,200	3,000	4,200	3,360	3,000	2,400
WLL4T	4,000	3,200	8,000	5,600	4,000	5,600	4,480	4,000	3,200
WLL5T	5,000	4,000	10,000	7,000	5,000	7,000	5,600	5,000	4,000
WLL6T	6,000	4,800	12,000	8,400	6,000	8,400	6,720	6,000	4,800
WLL8T	8,000	6,400	16,000	11,200	8,000	12,000	8,960	8,000	6,400

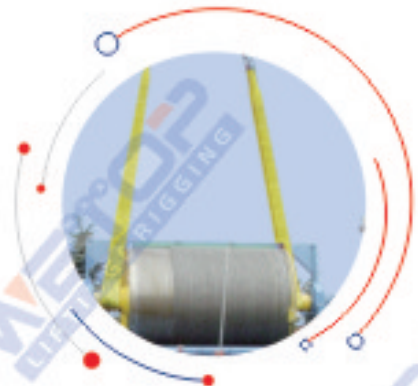

ROUND SOFT SLING

ROUND SOFT SLING

EYE-EYE WEBBING SLING

Round sling can be loaded up to 300 Tons, effective length is 80 meters, safety factor generally adopts 6:1 and 7:1, it is made from tensile polyester industrial filament, inner loading core forms circular shape in endless rounding, outer thimble made from 100% polyester does not assume weight and protects the inner loading core,

Material: 100% Polyester

Safety Factor: 5:1 6:1 7:1 8:1

Standard: EN1492-2:2000

Length: 1-80m

Color: Color code



THE CHARACTERISTICS OF PRODUCT

1. Be especially fit for lifting the round body.
2. It is softer than any other lifting tool, making it able to attach more tightly to the surface of the lifted body.
3. Can append the protective sleeves for abrasion and cutting-prevention.
4. It is easy to make up many kinds of lifting modes.
5. High abrasion resistance, corrosion resistance, mould resistance.
6. Elasticity extension is smaller.

Load Scope: 1T-300T

Art.No	Working load limit (kg)	Approx thickness (mm)	Approx width (mm)	Minimum length (m)	Maximum length (m)	Weight/meter (kg/m)	
						6:1	7:1
EN1T	1000	6	40	0.5	80	0.30	0.35
EN2T	2000	7	50	0.5	80	0.44	0.52
EN3T	3000	8	60	0.5	80	0.65	0.74
EN4T	4000	9	70	0.5	80	0.83	0.91
EN5T	5000	11	75	0.5	80	1.01	1.29
EN6T	6000	12	80	1.0	80	1.19	1.39
EN8T	8000	13	90	1.0	80	1.50	1.75
EN10T	10000	15	100	2.0	80	1.95	2.28
EN12T	12000	16	110	2.0	80	2.46	2.87
EN15T	15000	18	125	2.0	80	2.97	3.47
EN20T	20000	20	150	2.5	80	4.66	5.440
EN25T	25000	24	180	2.5	80	5.84	6.820
EN30T	30000	32	200	2.5	80	9.23	10.80
EN40T	40000	40	200	2.5	80	12.10	14.20
EN50T	50000	45	220	2.5	80	14.10	16.30
EN60T	60000	65	240	4.0	80	17.30	20.20
EN80T	80000	70	260	4.0	80	22.20	25.90
EN100T	100000	80	290	4.0	80	26.00	30.30
EN200T	200000	120	450	5.0	80	64.00	74.60
EN300T	300000	160	525	5.0	80	79.00	92.20

ROUND SLING-AMERICAN STANDARD (ASME/ANSI B30.9) SYNTHETIC ENDLESS ROUND SLING



No	Colour	Vertical	Chocker	Vertical	60°	45°	30°
		lbs	lbs	Basket	Basket	Basket	Basket
1	Violet	2,600	2,100	5,200	4,500	3,700	2,600
2	Green	5,300	4,200	10,600	9,200	7,500	5,300
3	Yellow	8,400	6,700	16,800	14,500	11,900	8,400
4	Tawney	10,600	8,500	21,200	18,400	15,000	10,600
5	Red	13,200	10,600	26,400	22,900	18,700	13,200
6	Brown	16,800	13,400	33,600	29,100	23,800	16,800
7	Blue	21,200	17,000	42,400	36,700	30,000	21,200
8	Orange	25,000	20,000	50,000	43,300	35,400	25,000
9	Grey	31,000	24,800	62,000	53,700	43,800	31,000
10	Orange	40,000	32,000	80,000	69,300	56,600	40,000
11	Brown	53,000	42,400	106,000	91,800	74,900	53,000
12	Olive green	66,000	52,800	132,000	114,300	93,300	66,000
13	Black	90,000	72,000	180,000	155,900	127,300	90,000

Remarks: Eye and eye type round sling is available upon request

When ordering it is important to make clear whether the length specified is circumference or effective working length

Safety Factor: 5:1 to ASME/ANSI B.30.9

Warning: Do not exceed rated capacities, ratings must be reduced when slings are used at angles less than 90° from horizontal.

Load Scope: 1T-300T



ENDLESS WEBBING SLING

FLAT ENDLESS WEBBING SLING

POLYESTER WEBBING SLING ENDLESS TYPE

Type

Endless polyester webbing slings
Single or double ply

Technical specifications

Color coded according to EN1492-1
Capacity stripes: each stripe is equal to 1 tonne capacity

Characteristics

Low elongation
Extra strong webbing for a high abrasion resistance

Norms

According to Machine Directive 2006/42/EC



Color coded according to EN1492-1	Working Load Limit with 1 webbing sling							Working Load Limit with 2 webbing slings			
	Straight lift	Choked lift	0-7	β				Straight lift up to 45	Choked lift up to 45	Straight lift 45-60	Choked lift 45-60
				0-7	7-45	45-60	45-60				
WLL1T	1,000	800	2,000	1,400	1,000	700	500	1,400	1,120	1,000	800
WLL2T	2,000	1,600	4,000	2,800	2,000	1,400	1,000	2,800	2,240	2,000	1,600
WLL3T	3,000	2,400	6,000	4,200	3,000	2,100	1,500	4,200	3,360	3,000	2,400
WLL4T	4,000	3,200	8,000	5,600	4,000	2,800	2,000	5,600	4,480	4,000	3,200
WLL5T	5,000	4,000	10,000	7,000	5,000	3,500	2,500	7,000	5,600	5,000	4,000
WLL6T	6,000	4,800	12,000	8,400	6,000	4,200	3,000	8,400	6,720	6,000	4,800
WLL8T	8,000	6,400	16,000	11,200	8,000	5,600	4,000	11,200	8,960	8,000	6,400

Color coded according to EN1492-1	Working Load Limit with 1 webbing sling							Working Load Limit with 2 webbing slings			
	Straight lift	Choked lift	0-7	β				Straight lift up to 45	Choked lift up to 45	Straight lift 45-60	Choked lift 45-60
				0-7	7-45	45-60	45-60				
WLL2T	2,000	1,600	4,000	2,800	2,000	1,400	1,000	2,800	2,240	2,000	1,600
WLL3T	3,000	2,400	6,000	4,200	3,000	2,100	1,500	4,200	3,360	3,000	2,400
WLL4T	4,000	3,200	8,000	5,600	4,000	2,800	2,000	5,600	4,480	4,000	3,200
WLL8T	6,000	4,800	12,000	8,400	6,000	4,200	3,000	8,400	6,720	6,000	4,800
WLL8T	8,000	6,400	16,000	11,200	8,000	5,600	4,000	11,200	8,960	8,000	6,400









Economical & adaptable sling with no fixed wear points, Used in all hitches, we can produce single and multi-ply webbing slings according to customers' requirements, using materials such as polyester Nylon Polypropylene, the safety factor from 5:1 to 8:1 are available We make these products according to ISO4878,AS1353,EN1492-1,complied with GS CE safety require, Customers could choose special lengths based on special requirement.

**MULTI-PLY ENDLESS WEBBING SLINGS PLY STOCK NO.WLL
(ACCORDING TO EN1492-1)**

Endless webbing Sling 1 ply	
WLL (kg)	Width *thickness (mm*mm)
1000	30*3
1000	50*3
1500	50*3
2000	60*3
3000	90*3
4000	120*3
5000	150*3
6000	180*3
8000	240*3
10000	300*3
12000	300*3
Endless webbing Sling 2 ply	
WLL (kg)	Width *thickness (mm*mm)
1000	30*7
2000	50*6
3000	50*6
4000	60*7
6000	90*7
8000	120*7
10000	150*7
12000	180*7
16000	240*7
20000	300*7
24000	300*7

SYNTHEIC ENDLESS WEBBING SLINGS ASME/ANSI B30.9 (LBS)



Series	Hitch Type Width(in.)	Type I,II,III,and IV			Two-leg or Single Basket		
		Single-leg			Horizontal Angle		
		Vertical (LBS)	choke (LBS)	Vertical basket (LBS)	60 deg (LBS)	45 deg (LBS)	30 deg (LBS)
	Width(in.)						
Class 5	1	2200	1760	4400	4400	3800	3100
	1 1/2	3300	2640	6600	6600	5700	4700
	1 3/4	3800	3040	7600	7600	6600	5400
	2	4400	3520	8800	8800	7600	6200
	3	6600	5280	13200	13200	11400	9300
	4	8200	6560	16400	16400	14200	11600
	5	10200	8160	20400	20400	17700	14400
	6	12300	9840	24600	24600	21300	17400
Class 7	1	3100	2480	6200	6200	5400	4400
	1 1/2	4700	3760	9400	9400	8100	6600
	1 3/4	5400	4320	10800	10800	9400	7600
	2	6200	4960	12400	12400	10700	8800
	3	8800	7040	17600	17600	15200	12400
	4	11000	8800	22000	22000	19100	15600
	5	13700	10960	27400	27400	23700	19400
	6	16500	13200	33000	33000	28600	23000
	8	22750	18200	42350	42350	36700	29900
	10	28400	22720	52900	52900	45800	37400
	12	34100	27280	63500	63500	55000	44900

ONE WAY SLING

ONE WAY SLING


They are made in several width and strength according to the intended use. The slings are designed for one load only (to enable that load to be dispatched and received) and are not intended for repeated use. This type of sling would not need to be subjected to Periodic examination by a competent person, due to its disposable nature

Safety Factor: 4:1 5:1 7:1

Length: As required

Standard: DIN 60005-2006 EN1492-1

Color: White or customized

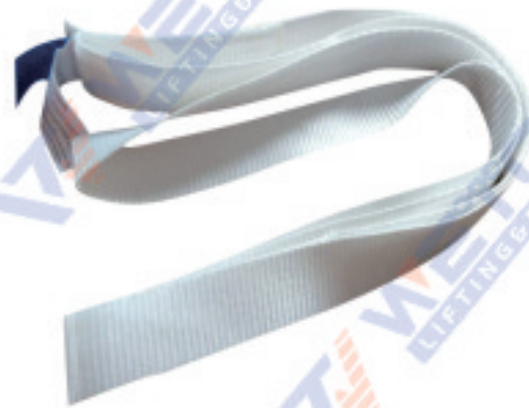

S.F.	WLL(kg)	Width (mm)	S.F.	WLL(kg)	Width (mm)
4:1	300	25	7:1	600	30
4:1	500	25	7:1	600	35
4:1	1500	35	7:1	600	50
5:1	350	25	7:1	650	35
5:1	380	25	7:1	700	35
5:1	500	25	7:1	750	25
5:1	600	25	7:1	750	35
5:1	650	25	7:1	750	50
5:1	750	25	7:1	900	30
7:1	300	25	7:1	900	40
7:1	350	25	7:1	950	40
7:1	400	25	7:1	1000	30
7:1	500	25	7:1	1000	45
7:1	500	35	7:1	1000	50
7:1	500	50	7:1	2000	60

TOW STRAP

TOW STRAP

Simply the best way to tow a stuck or disabled car, pickup or jeep. The zinc plated forged hooks are specially designed for towing application and easily attach to the vehicle frame. Lighter than steel rope and tow chain and won't rust, rot, or mildew. Stores easily in a car trunk


Lashing Capacity (kg)	Width (mm)	Length (m)	Application
3000	45	4	Car Jeep
3000	45	6	Car Jeep
4000	60	4	Car Jeep
4000	60	6	Car Jeep
5000	60	4	Car Jeep
5000	60	6	Car Jeep
8000	90	4	Car Jeep
8000	90	6	Car Jeep
8000	50	6	Truck
12000	75	6	Truck
15000	75	6	Heavy Truck
20000	100	6	Heavy Truck



These extra heavy-duty tow straps are designed to free stuck or disabled vehicles from mud, sand, or snow. The strap has a loop sewn in each end that slips easily onto a frame mounted tow hook. The webbing stretches up to 20% during use and then recoils to its original length. The forward momentum of the towing vehicle PLUS the recoil action will all but guarantee success when you are really stuck. Available up to 20,000kg or over, for farm tractors, trucks, and heavy equipment.

WEBBING BELT/TAPE

PACKING STRAP AND BUCKLE POLYESTER PACKING STRAP

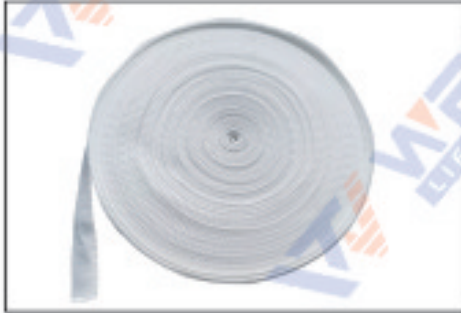

size	length	system tension
13mm	1000M/roll	600kg
16mm	850M/roll	720kg
16mm	600M/roll	960kg
19mm	600M/roll	928kg
19mm	500M/roll	1200kg
19mm	500M/roll	1328kg
19mm	400M/roll	1760kg
25mm	500M/roll	1600kg
25mm	500M/roll	1920kg
32mm	330M/roll	2400kg

More cost advantage than steel


No sharp corners, achieving the purpose of safety

Similar in hardness to steel, but more than 75% lighter in weight

If necessary, use (metal) buckles and tensioners to easily reinforce



HEAVY DUTY POLYESTER PACKAGING TAPE

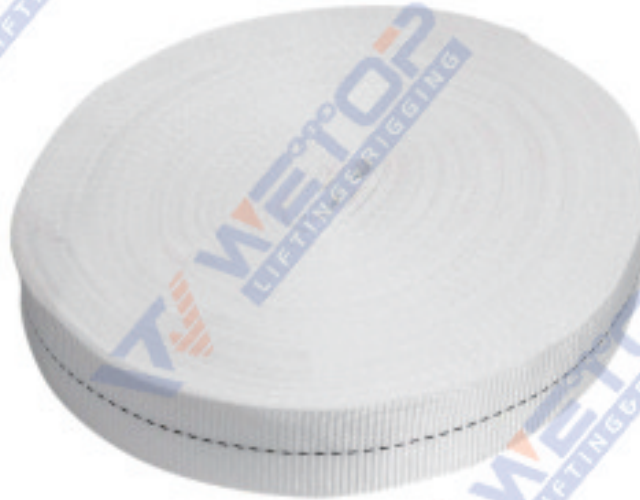

linear strength	width	length: M/R
1600KG	32mm	250
2000KG	32mm	250
3500KG	38mm	200
5000KG	50mm	200
6000KG	50mm	150
7500KG	50mm	150

More cost advantage than steel
No sharp corners, achieving the purpose of safety
Similar in hardness to steel, but more than 75% lighter in weight
If necessary, use (metal) buckles and tensioners to easily reinforce
Cut as needed to save costs

PHOSPHATE PACKING BUCKLE



number	diameter	tape width	tension	packing	kilograms per box
1	3.3mm	13mm	480kg	1000pcs/box	9.6kg/box
2	3.5mm	16mm	680kg	1000pcs/box	12.8kg/box
3	4.0mm	19mm	950kg	1000pcs/box	20kg/box
4	5.0mm	25mm	1250kg	500pcs/box	19kg/box
5	6.0mm	25mm	1600kg	500pcs/box	28kg/box
6	7.0mm	32mm	2500kg	250pcs/box	22kg/box
7	7.0mm	38mm	2700kg	250pcs/box	23.8kg/box
8	8.0mm	50mm	4000kg	150pcs/box	23kg/box



WEBBING BELT BELT FOR WEBBING SLING

	Safety Factor	Width(mm)	Color	M.B.S(kg)
	5:1	25	Violet	3125
	6:1	25/38		3750
	7:1	30/50/60		4500
	8:1	50		5000
Safety Factor	Width(mm)	Color		M.B.S(kg)
	5:1	50	Green	6250
	6:1	50		7500
	7:1	60		9000
	8:1	65		10000
	Safety Factor	Width(mm)		Color
	5:1	75	Yellow	9375
	6:1	75		11250
	7:1	90		13500
	8:1	95		15000
	Safety Factor	Width(mm)		Color
	5:1	100	Grey	13000
	6:1	100		15000
	7:1	120		18000
	8:1	120		20000
	Safety Factor	Width(mm)		Color
	5:1	125	Red	15625
	6:1	125		18750
	7:1	150		22500
	8:1	150		25000
	Safety Factor	Width(mm)		Color
	5:1	150	Brown	18750
	6:1	150		22500
	7:1	180		27000
	8:1	180		30000
	Safety Factor	Width(mm)		Color
	5:1	200	Blue	25000
	6:1	200		30000
	7:1	240		36000
	8:1	240		40000
	Safety Factor	Width(mm)		Color
	5:1	250	Orange	31250
	6:1	250		37500
	7:1	300		45000
	8:1	300		50000
	Safety Factor	Width(mm)		Color
	5:1	300	Orange	37500
	6:1	300		45000
	7:1	300		54000

We can offer 1"-12"(25-300mm) webbing material for sewing all kinds of webbing sling to you. Which are made of Polyester, Nylon. We have a prepare to adopt PE PA or PP to product according to customers require Webbing material for difference safety factor duplex eye-eye and single endless webbing sling According to EN1492-1,JB/T8521.1,AS1353.1

BELT FOR RATCHET STRAP



Safety factor	Work intensity	Width	Weight per meter	Color line
2	0.5T	25mm	22g	1 black dashed line
	1T	35mm	55g	2 black dashed lines
	1.5T	38mm	75g	3 black dashed lines
	2T	50mm	95g	4 black dashed lines
	2.5T	50mm	105g	5 black dashed lines
	4T	75MM		8 black dashed lines
	5T	75MM		10 black dashed lines
	5T	100MM		10 black dashed lines
	6T	100MM		12 black dashed lines